



P3C989

・ON

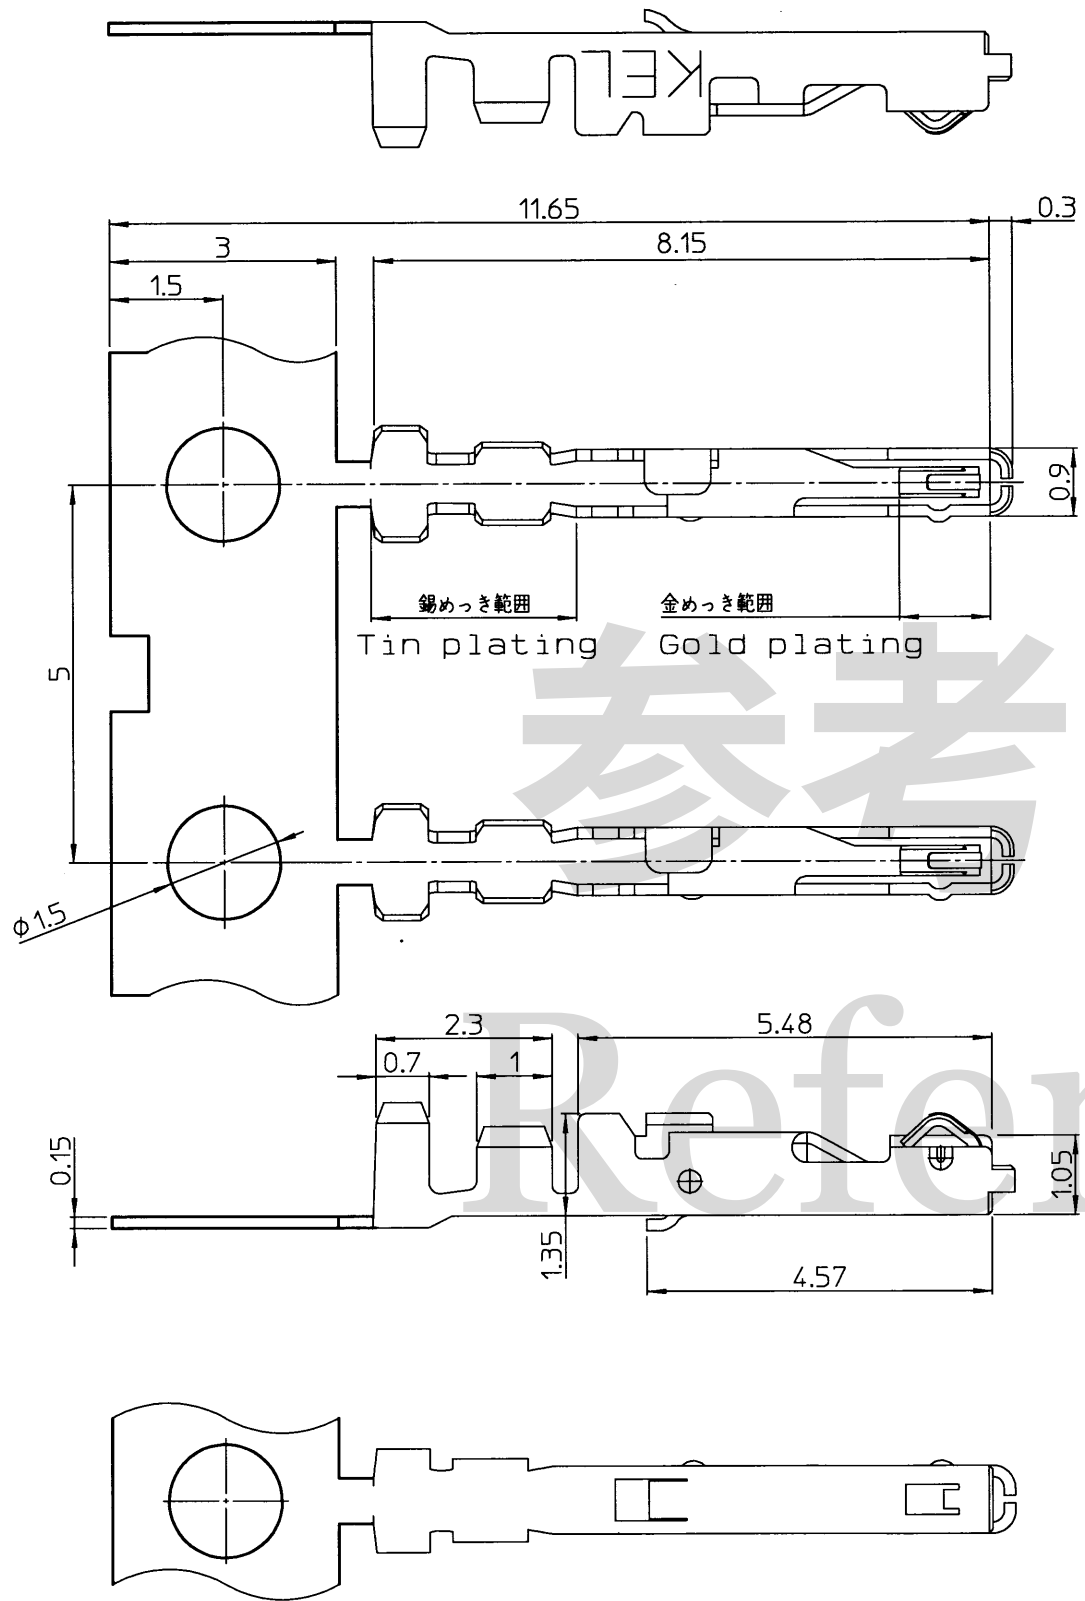

NOTES

- 単位:mm/Dimensions are in millimeter.
- 指定無き寸法公差/Unless otherwise specified, tolerance shall be
0~10未満 ± 0.2 /Less than 10 ± 0.2
10以上 ± 0.3 /10 or more ± 0.3
- コンタクトめっき仕上げ/Contact finish
ニッケルめっき下地/Under plating Nickel
接触部:金めっき仕上げ ($0.05\mu\text{m}$ 以上)/Contact area Au $0.05\mu\text{m}$ or more
圧着部:錫めっき仕上げ ($1.0\mu\text{m}$ 以上)/Crimp area Tin $1.0\mu\text{m}$ or more
- 品名/Part number
#569
8929用圧着コンタクト/8929 Series Contact (Crimp type)
- 適合電線/Applicable cable
AWG26~30 (仕上がり外径 $\phi 1.0$ 以下)
/Size:AWG26~28 (Insulation Dia. $\phi 1.0$ or less)
- アセンブリツール/Assembly tools
アプリケーション 型番:DFS790800
/Crimping machine applicator:DFS790800
メーカー:日本オートマチックマシン(株)
/Manufacturer:JAPAN AUTOMATIC MACHINE CO.,LTD.
ハンドツール 型番:CH-03
/Crimping hand tools:CH-03
- 梱包形態/Packaging illustration
下図参照/Refer to the drawing listed below

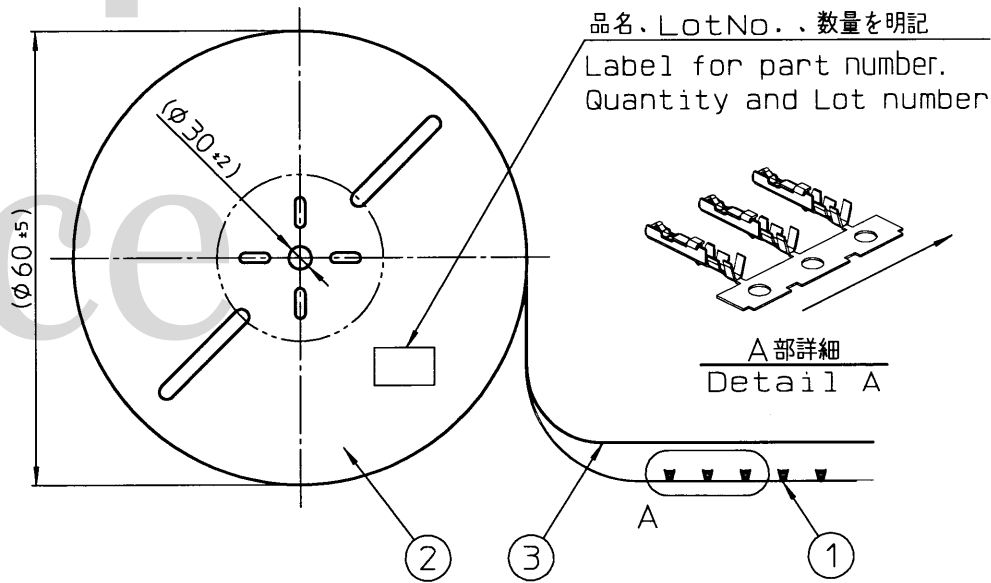

③	層間紙/Sandwich Paper between layers of contact	1	紙/Paper	—
②	リール/Reel	1	紙/Paper	—
①	コンタクト/Contact	20,000	銅合金/Copper alloy	SEE NOTE3
NO.	品名/Component	数量/Quantity	材質/Material	仕上げ/Finish

△ x									
△ x									
△ x									
△ x									
REV. DATE	APPROVED BY	DRAWN BY	DESCRIPTION						
THIRD ANGLE PROJECTION	DRAWN BY H. Toga	DATE Jul. 24, 2014	CHECKED BY N. Saito	DATE Jul. 25, 2014	APPROVED BY M. Suzuki	DATE Jul. 28, 2014	SCALE 10:1	KEL CORPORATION	
MATERIAL	TITLE #569							DRAWING No. P3C989	REVISION 1
FINISH									