
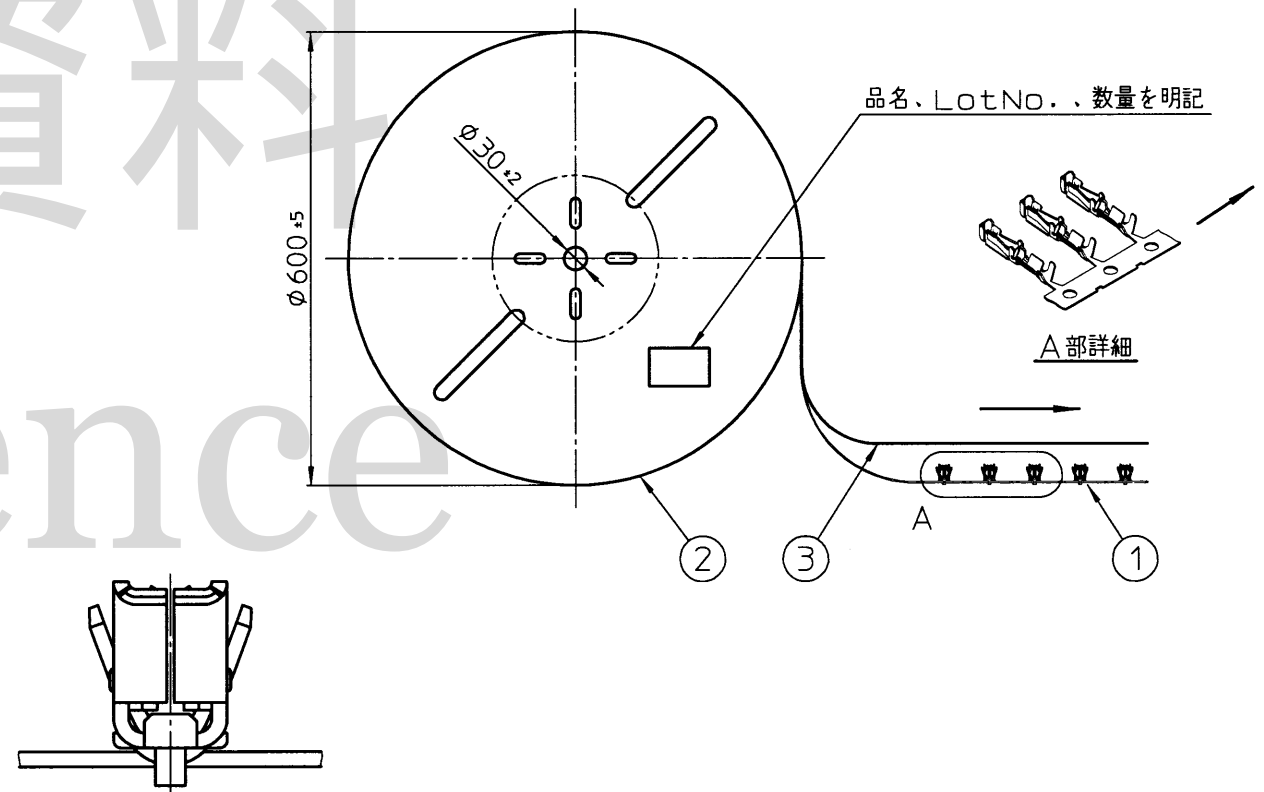


-
- Technical drawing of a connector assembly, showing two views: a top view (upper half) and a side view (lower half). The drawing includes dimensions in millimeters (mm) and Japanese text indicating plating areas.
- Top View Dimensions:**
- Overall width: 14
 - Distance from left edge to center of top hole: 2.6
 - Distance from left edge to center of bottom hole: 1.3
 - Distance from center of top hole to right edge: 9.78
 - Overall height: 6
 - Left hole diameter: $\phi 1.5$
 - Right hole diameter: $\phi 1.5$
 - Plating area label (left): 錫めっき範囲 (Tin plating range)
 - Plating area label (right): 金めっき範囲 (Gold plating range)
- Side View Dimensions:**
- Overall height: 2.2
 - Distance from bottom edge to top of first step: 0.2
 - Distance from left edge to start of first step: 0.8
 - Distance from start of first step to start of second step: 3.4
 - Distance from start of second step to start of third step: 1.8
 - Distance from start of third step to right edge: 4.2
 - Distance from right edge to end of third step: 0.98
 - Distance from left edge to end of third step: 5.28



△×	.	.						
△×	.	.						
△×	.	.						
△×	.	.						
記号×数	年	月	日	変 更 内 容			担当	承認
 第三角法	承認	2015年4月21日		検図	2015年4月21日		製図	2015年4月21日
		鈴木光雄		図	斎藤尚史		図	田中慎太郎
材	#587 製品図			ケル株式会社				版
質				P3D134				1
仕								
上				図面				
				番号				