
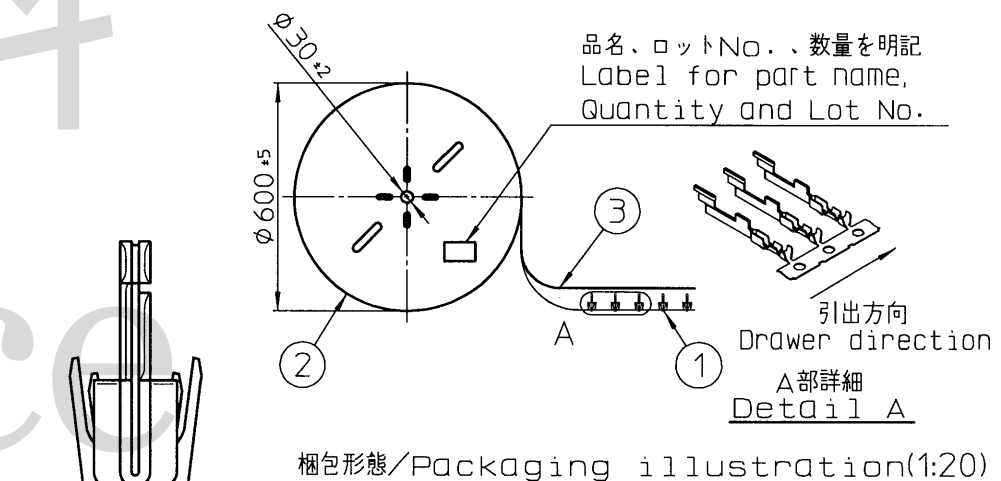
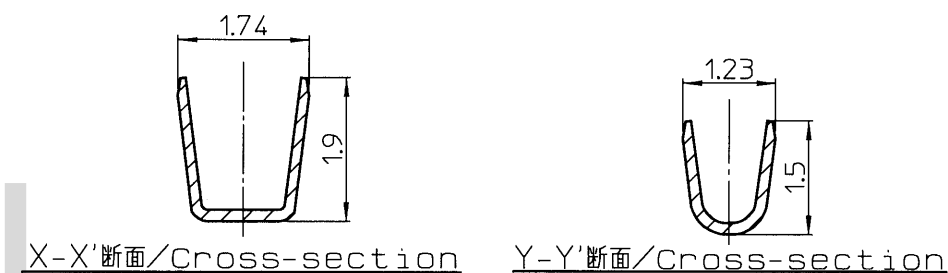



NOTES

- 指定なき寸法公差/Unless otherwise specified, tolerance shall be
0~10未満/Less than 10 ± 0.2
10以上/10 or more ± 0.3
- #615-5仕上/Finish
ニッケルめっき下地/Under plating Nickel
接触部/金めっき仕上/Contact area/Gold plating(0.1 μ m以上/or more)
圧着部/錫めっき仕上/Crimp area/Tin plating(1.0 μ m以上/or more)
- 品名/Part name
#615-5
— コンタクト長さ:標準より1mm短い/Contact length:1mm shorter than standard
— 適合ケーブルサイズ/Applicable cable size
— AWG24(ケーブル被覆外径 $\phi 1.08 \sim 1.14$)
— AWG24(Insulation Dia. $\phi 1.08 \sim 1.14$)
— FAS12用圧着コンタクト/Crimp contact for FAS12
- アセンブリツール/Assembly tools

圧着アプリケーション/ Crimping applicator 日本オートマチックマシン(株)/Japan Automatic Machine Co., Ltd. EFS876600K	圧着ハンドツール Crimping hand tool CH-11
--	---

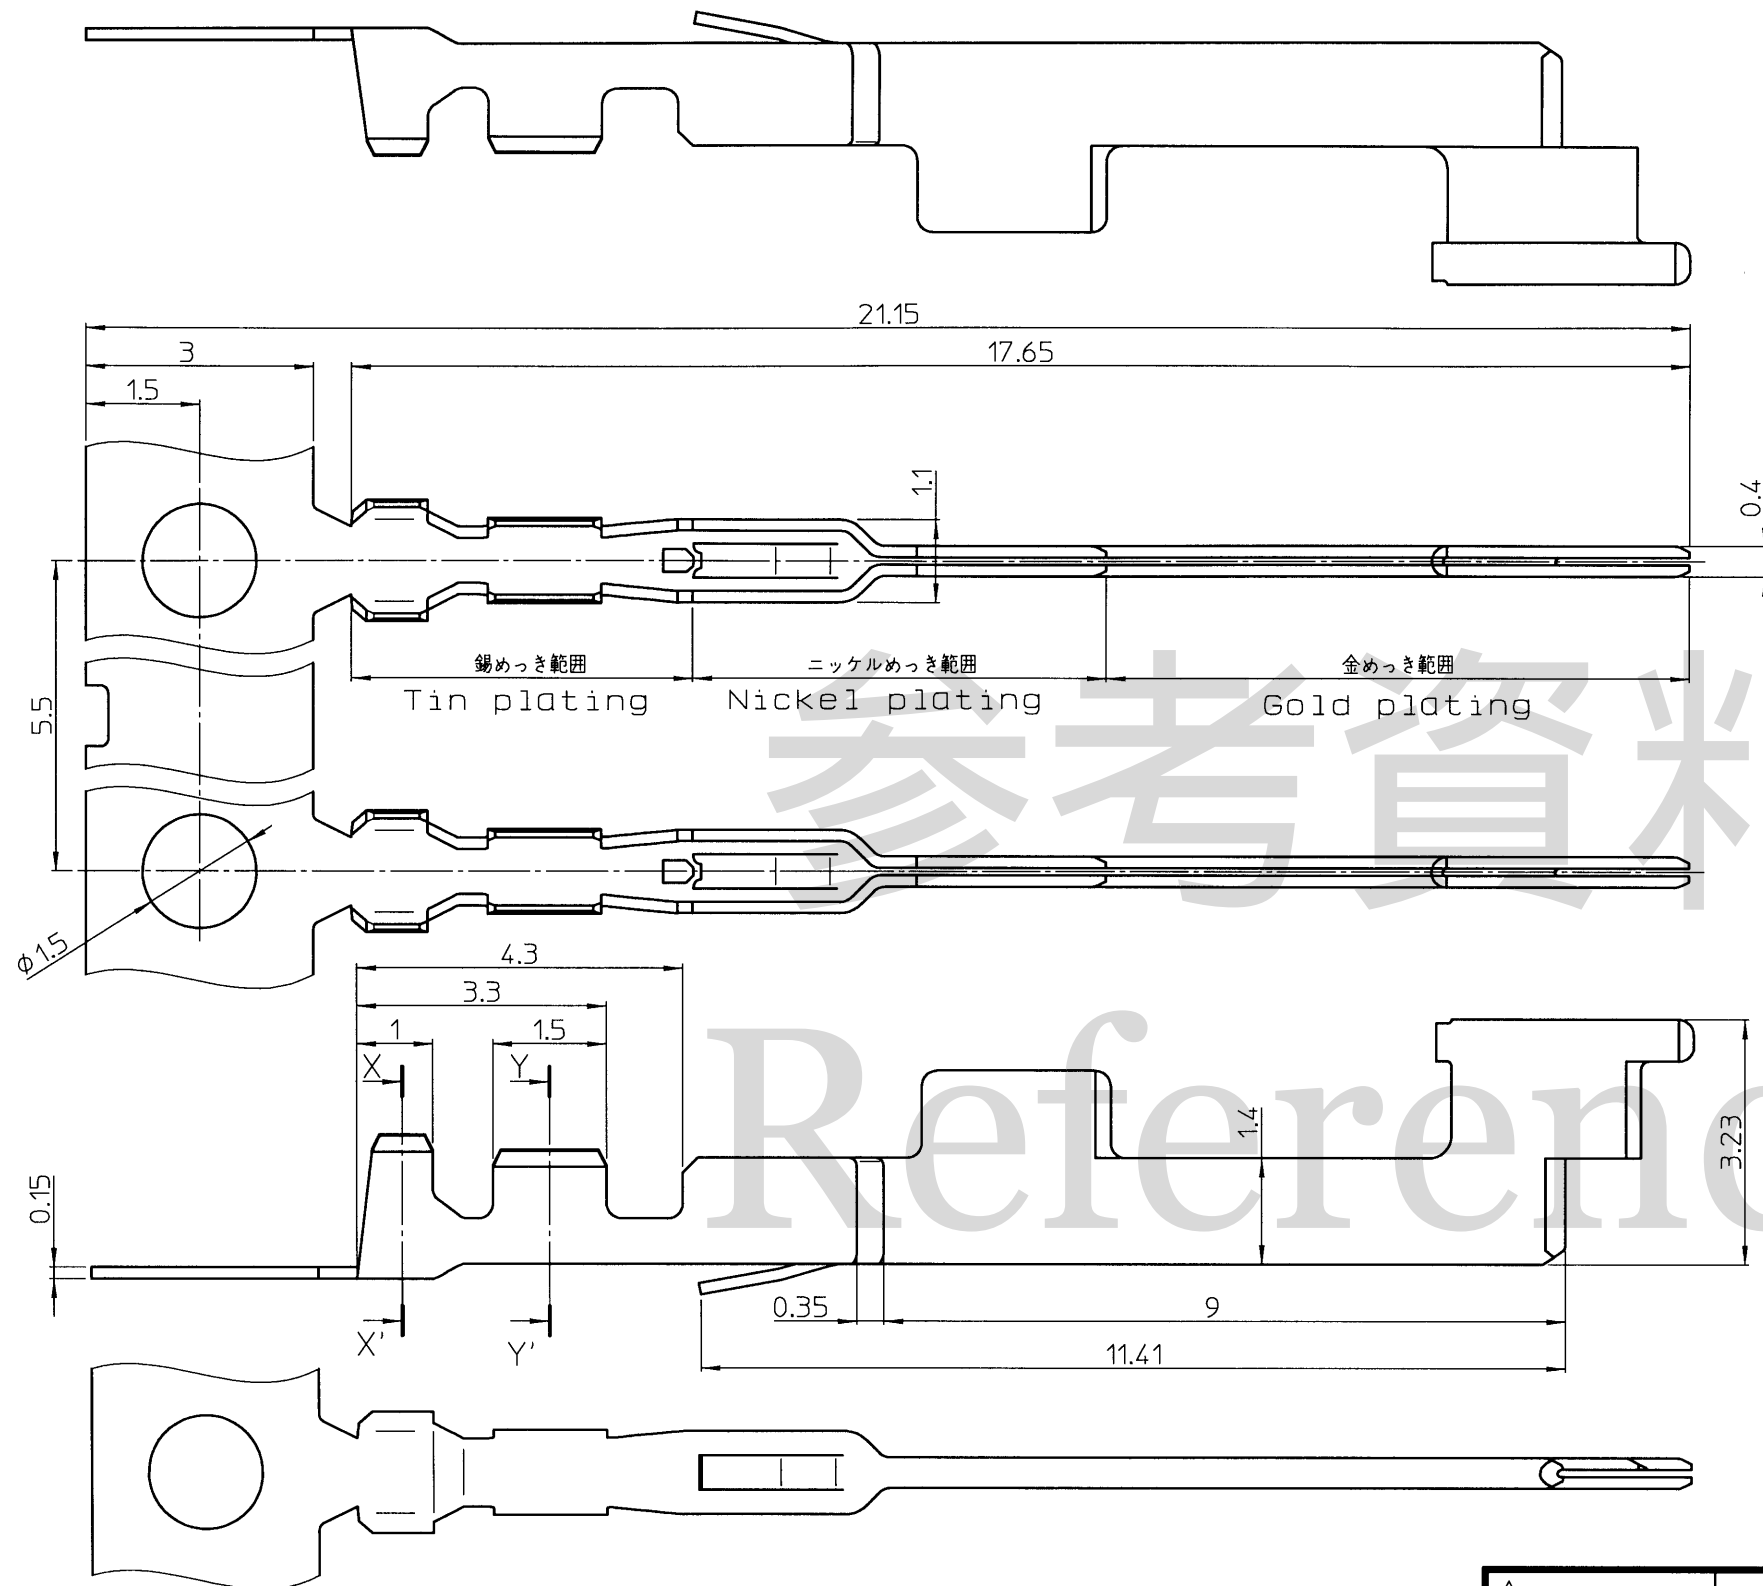

③	層間紙 Sandwich Paper between layers of contact	1	紙 Paper	
②	リール Reel	1	紙 Paper	
①	#615-5	5,000	銅合金 Copper alloy	SEE NOTE2
No.	品名 Part name	数量 Quantity	材質 Material	仕上 Finish

△ ×					ニッケルめっき範囲、背面図、断面追加、AWG24ケーブル被覆外径範囲拡大の為、改版。 Add Nickel plating and Rear view, Cross-section, expanded range of Insulation Dia.(AWG24)				
Jan.29,2021		<i>n. Sugita</i>	S.Takao	Y.Aoki					
REV. DATE		APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION				
THIRD ANGLE PROJECTION		DRAWN BY A.Yajima	DATE Oct.04,2016	CHECKED BY S.Takao	DATE Oct.04,2016	APPROVED BY N.Sugita	DATE Oct.04,2016	SCALE 10:1	UNIT mm
MATERIAL		TITLE #615-5			KEL CORPORATION				
FINISH					DRAWING No. P3D434			REVISION 3	