
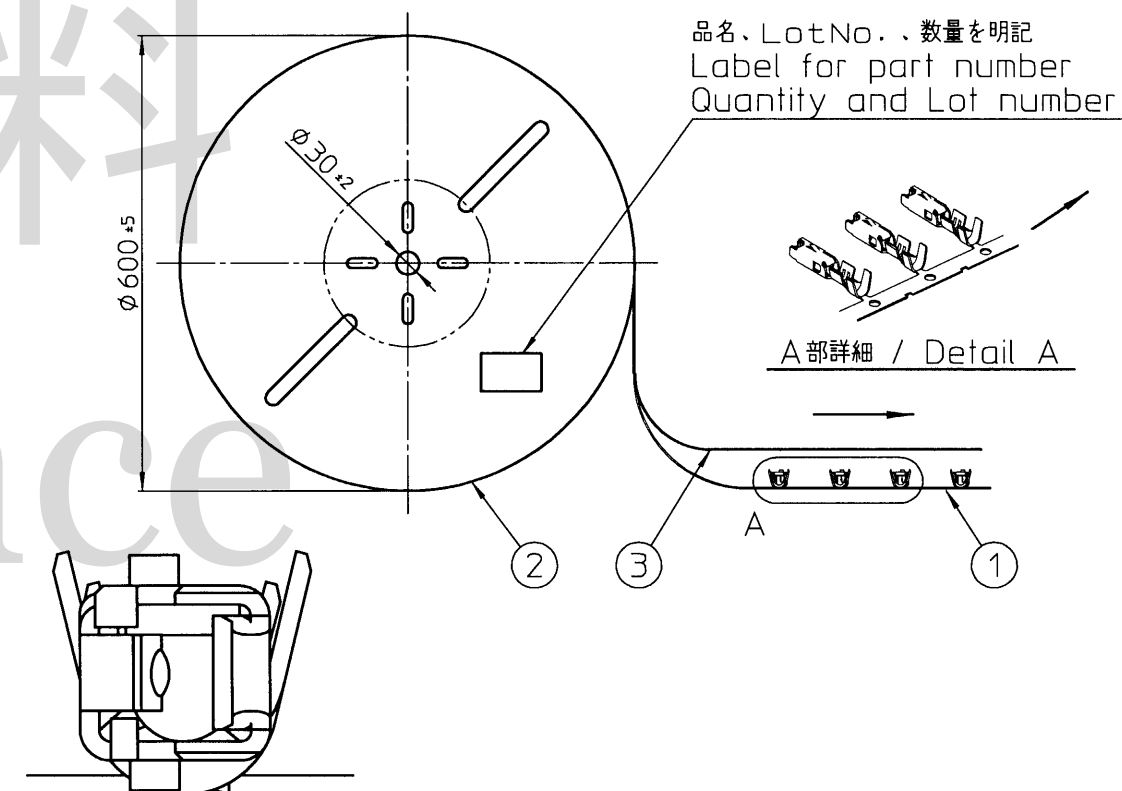


NOTES

- 指定なき寸法公差/Unless otherwise specified, tolerance shall be:
0~10未満 / Less than 10 ± 0.2
10以上 / 10 or more ± 0.3
- コンタクトめっき仕上/Contact finish
接触部・圧着部: 錫めっき仕上 (1.0 μ m以上)
/Contact area・Crimping area: Tin plating thickness 1.0 μ m or more
- 品名 / Part number
#635-□
種別/Type
無/None: 連鎖/Reel contacts, B: バラビン/Loose piece contacts
FWP01/11 共通圧着コンタクト / Crimp contact for FWP01/11
- 適合電線/Applicable Cable
AWG18~20 (仕上り外径 $\phi 1.5\sim 2.7$)
/Size: AWG18~20 (Insulation Dia. $\phi 1.5\sim 2.7$)
- アッセンブリツール/Assembly tools
アプリケーション 型番: CFX030500K-UP, メーカー: 日本オートマチックマシン(株)
/Crimping machine applicator: CFX030500K-UP
Manufacturer: JAPAN AUTOMATIC MACHINE CO., LTD.
ハンドツール型番: CH-12 / Crimping hand tool: CH-12
- 梱包形態 (連鎖) / Packaging illustration (Reel contacts)
下図参照/Refer to the drawing listed below

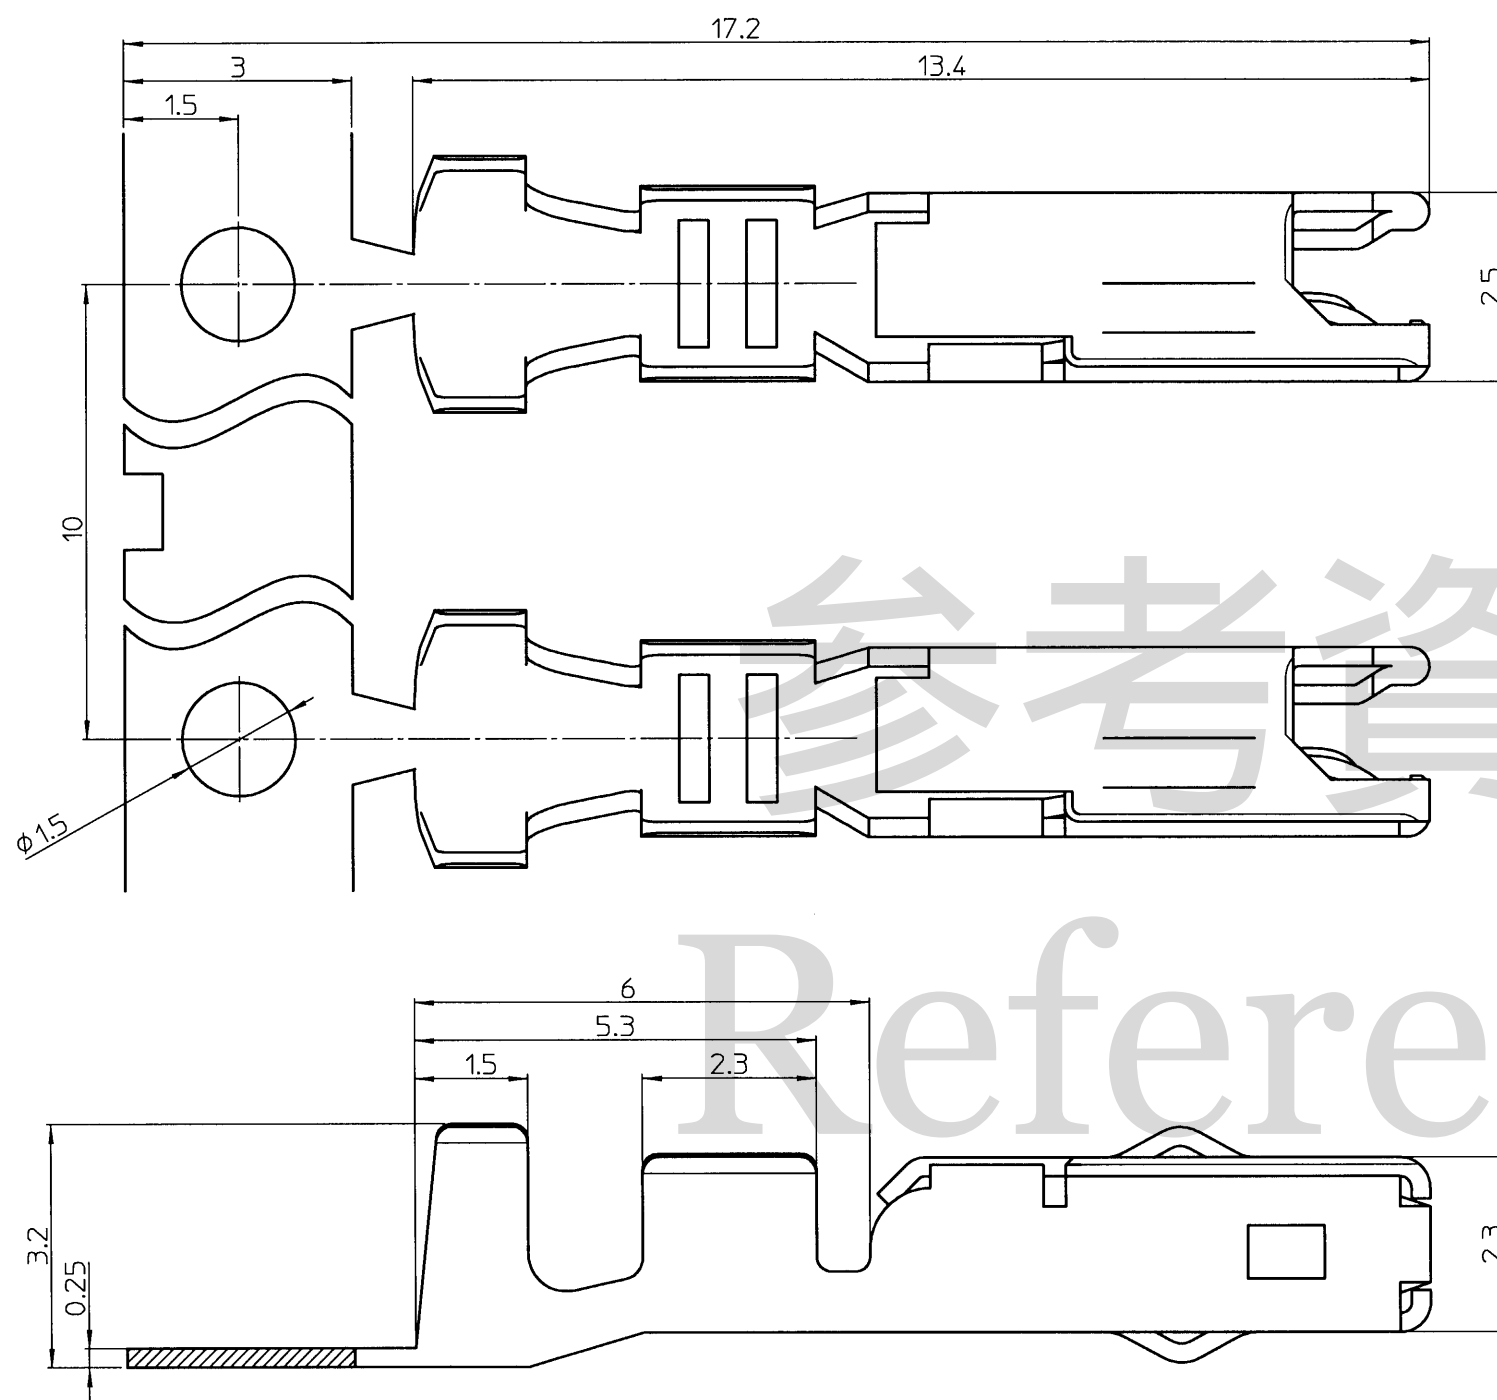

③	層間紙/Sandwich paper between layers of contact	1	紙/Paper	—
②	リール/Reel	1	紙/Paper	—
①	コンタクト/Contact	6,000	銅合金/Copper alloy	SEE NOTE2
No	品名/Part name	数量 Quantity	材質/Material	仕上/Finish

△ ×									
△ ×									
△ ×									
Dec.13,2019	<i>n. Sugita</i>	<i>K.Tagai</i>	<i>T. Tobarj</i>	NOTE4表記変更 / Changed NOTE 4.					
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION					
THIRD ANGLE PROJECTION	DRAWN BY S.Tanaka	DATE Jun.11,2019	CHECKED BY K.Tagai	DATE Jun.11,2019	APPROVED BY N.Sugita	DATE Jun.12,2019	SCALE 10:1	UNIT mm	
MATERIAL	TITLE				KEL CORPORATION				
FINISH	# 635, # 635-B				DRAWING No.		P3E035		REVISION 3