
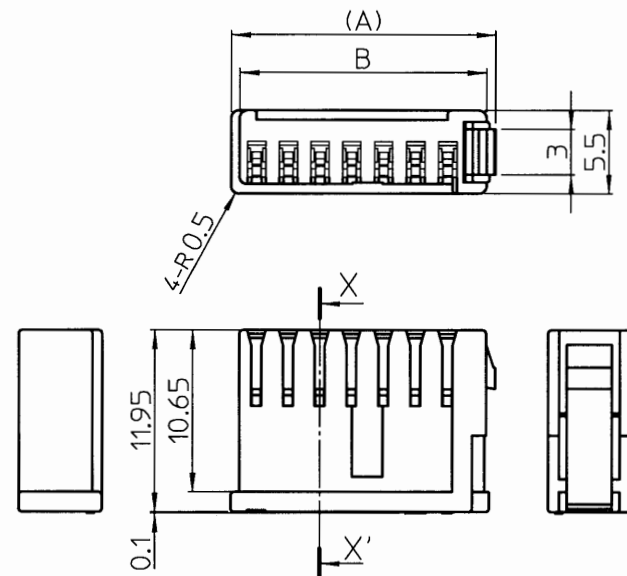
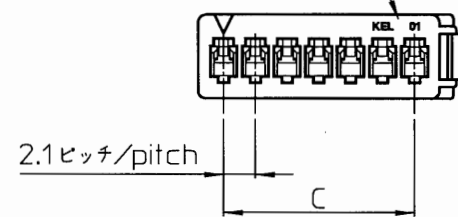


C	B	A	極数 No. of contacts
8.4	12.05	13.2	5
12.6	16.25	17.4	7



FK01-□□-A

製造メーカー/Marker
キャビNo./Cavity No.


A表示/display





FK01-□□-B

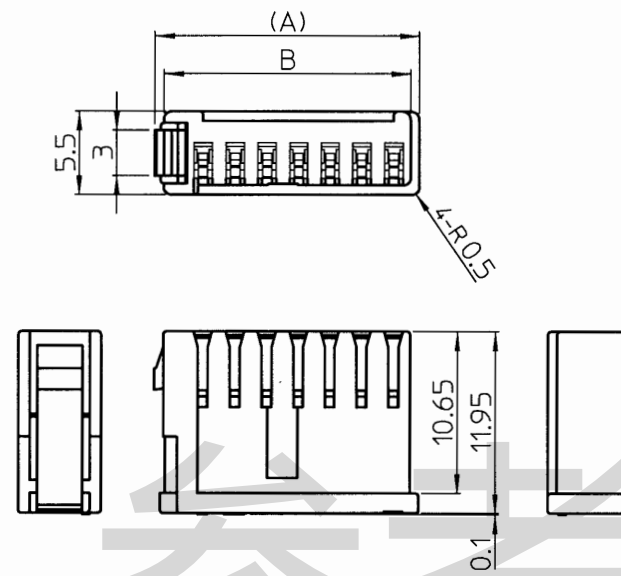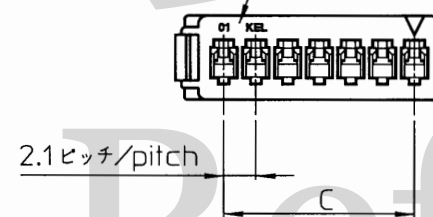製造メーカー/Marker
キャビNo./Cavity No.



B表示/display



FK01-□□-C

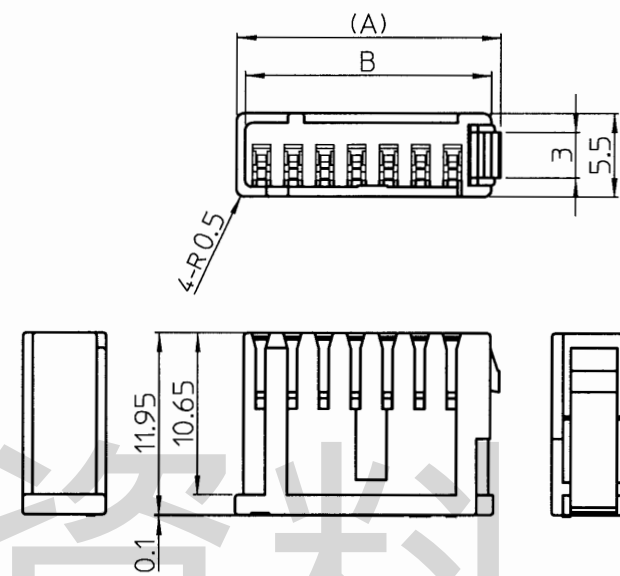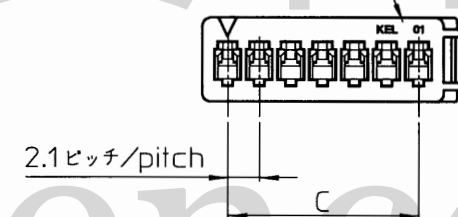製造メーカー/Marker
キャビNo./Cavity No.

C表示/display

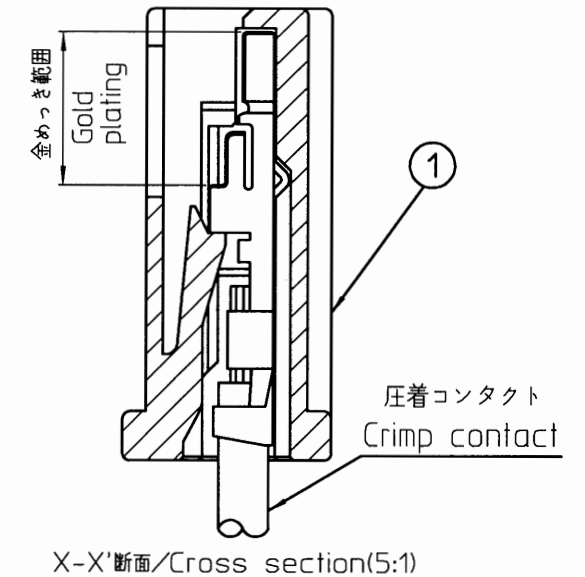

X-X'断面/Cross section(5:1)

NOTES

- 指定なき寸法公差
Unless otherwise specified, tolerance shall be
0~10未満/Less than 10 ± 0.2
10以上 /10 or more ± 0.3
- 圧着コンタクト仕上/Crimp contact finish
ニッケルめっき下地/Under plating Nickel
接触部/金めっき/Contact area/Gold plating(0.05 μ m以上/or more)
圧着部/ニッケルめっき/Crimp area/Nickel plating
- 本コネクタ適合コンタクト、ケーブル/Applicable contact and cable

コンタクト Contact	ケーブルサイズ/Cable size		ケーブル被覆外径 Insulation Dia.
	mm ²	AWG	
#696	0.08~0.3	28~22	φ0.8~1.7(※)

※ケーブル被覆外径によって、使用できるアッセンブリツールが異なります。

圧着仕様書(SP-5051)をご確認ください。

The assembly tool differs based on the insulation diameter.
Check the CRIMP SPECIFICATION (SP-5051).

- 品名/Part name

FK01-□□-□

ハウジング種類/Housing type

A、B、Cの3種類(誤挿入防止のため)


3 types:A,B,C(To prevent incorrect insertion)

極数/Number of contacts

シリーズ名/Series name

- 本図は7極で記載したものである。

This drawing is based on 7pin.

△ ×									
△ ×									
△ ×									
REV. DATE	APPROVED BY	CHECKED BY	DRAWN BY	DESCRIPTION					
 THIRD ANGLE PROJECTION	DRAWN BY Y.Aoki	DATE Mar.11, 2025	CHECKED BY P.Yamashita	DATE Mar.12, 2025	APPROVED BY K.Tagai	DATE Mar.12, 2025	SCALE 2:1	UNIT mm	
MATERIAL	TITLE				KEL CORPORATION				
FINISH	FKO 1 - □ □ - □				DRAWING No.			P3F001	REVISION 1

①	ハウジング Housing	各1 (A、B、Cの3種類) Each 1 (3 types:A,B,C)	PBT ガラス繊維入り UL94V-0 色:黒 Glass-filled PBT UL94V-0 Color:Black	仕上 Finish
No.	品名 Part name	数量 Quantity	材質 Material	